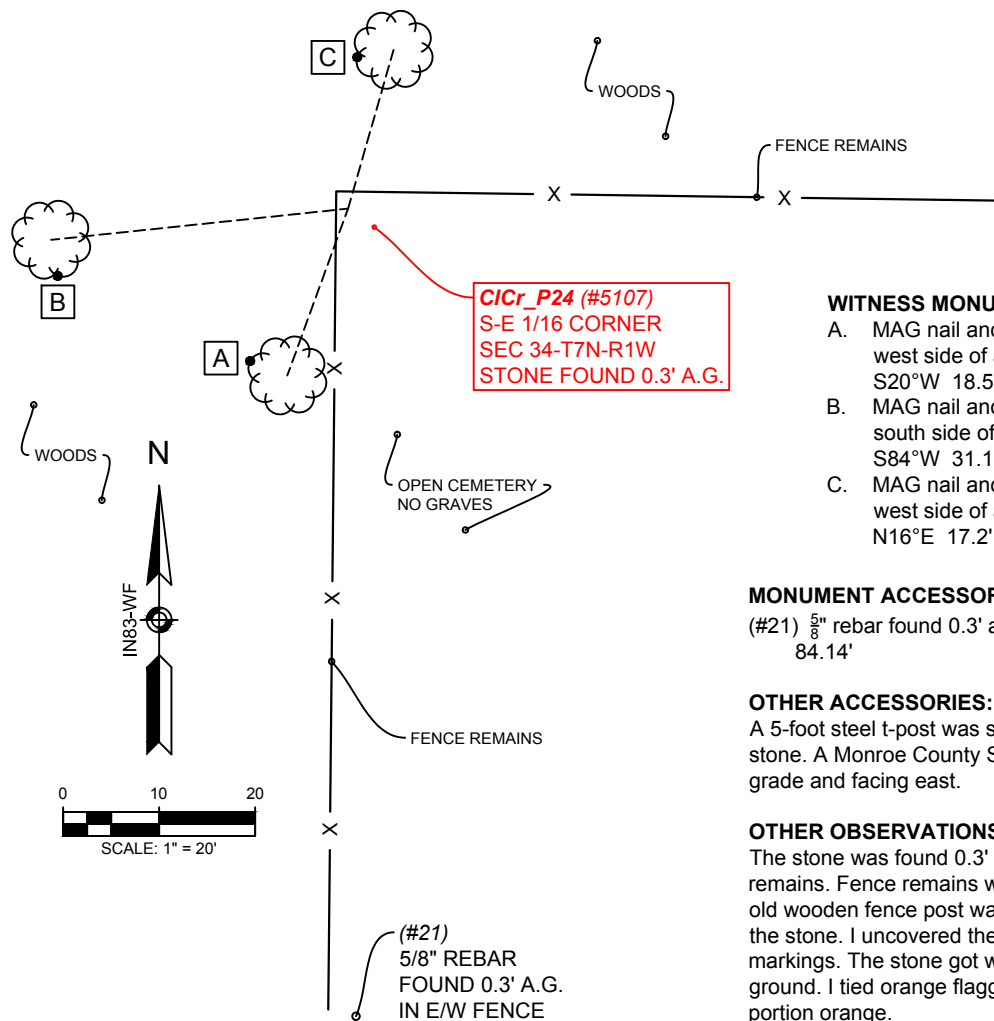


WITNESS MONUMENT TIES:

- MAG nail and shiner set in hack 1.1' above grade in the west side of a 16" maple;
S20°W 18.5'
- MAG nail and shiner set in hack 0.9' above grade in the south side of a 15" maple;
S84°W 31.1'
- MAG nail and shiner set in hack 2.9' above grade in the west side of an 8" maple;
N16°E 17.2'

MONUMENT ACCESSORIES:

(#21) $\frac{5}{8}$ " rebar found 0.3' above grade in east/west fence; S00°33'47"E 84.14'

OTHER ACCESSORIES:


A 5-foot steel t-post was set 3.8' above grade and 0.3' northwest of the stone. A Monroe County Surveyor Marker sign was attached 3.0' above grade and facing east.

OTHER OBSERVATIONS:

The stone was found 0.3' above grade, in line with north and south fence remains. Fence remains were found in the ground around the stone and an old wooden fence post was found lying on the ground about a foot west of the stone. I uncovered the top 11" of the stone and I did not find any markings. The stone got wider at the bottom and it remained solid in the ground. I tied orange flagging around it, reburied it and painted the exposed portion orange.

NOTES:

- Field work was performed on February 6, 2017 and October 24, 2017.
- Monroe County Surveyor's Field Book 48, pages 55 and Field Book 50, page 78.
- Project Name: ClearCreek2017, Field work by: RSO and CAR, Drawn by: RSO, Reviewed by: RSO & TER.
- This document is not complete without the associated plat and report of survey for Section 34-T07N-R01W by Rachel Oser, of the Monroe County Surveyor's Office, dated May 29, 2018 and recorded as Instrument Number 2018006787 in the Monroe County Recorder's Office.
- Coordinates shown hereon were obtained from GPS observations utilizing the Indiana Real-Time Network (INCORS). Indiana West Zone, NAD83(2011) Epoch 2010.0000, State Plane Grid Coordinates, US Survey Feet. Geoid model G2012BU7. Datum NAD83_NO_TRANS.
- Vicinity sketch was compiled per 2017 aerial photography. Bearings and distances to witness ties were collected with a 100' cloth tape and a 2° compass adjusted for declination.
- Photos were taken with an iPhone 6S on February 6 and October 24, 2017

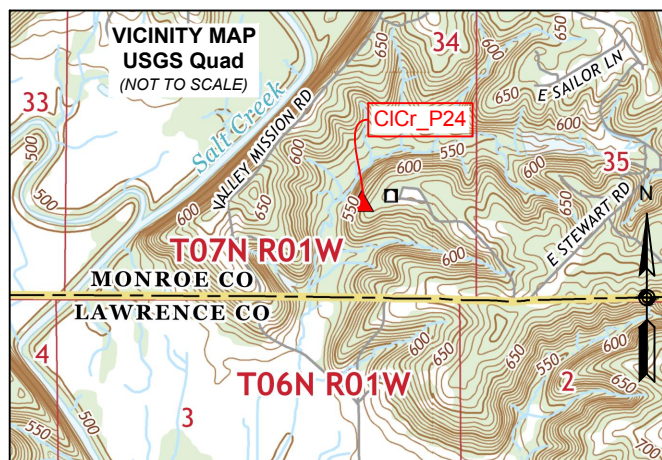

▲ **Monument Description:** A 3" x 1" limestone was found 0.3' above grade with no markings

State Plane Grid Coordinates: Northing: 1365293.1', Easting: 3117611.9'

SHEET
1
OF
2

MONUMENT RECORD
CORNER ID:
CICr_P24

South-East 1/16 Corner
Section 34- T07N-R01W
Clear Creek Township
Monroe County, Indiana



OFFICE OF THE MONROE COUNTY SURVEYOR
Trohn Enright-Randolph Monroe County Surveyor
Rachel Savich Oser Professional Surveyor
119 West 7th Street, Bloomington, IN 47404 (812) 349-2570



ORIGINAL GOVERNMENT SURVEY: *Not an original government corner.*

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: 11/24/1871 By: Alexander Spencer, MCS

Where filed or recorded: LSB2, pg 182

Monument: Stake

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Dist. (lks)	Dist. (ft)
Beech	20"	S72.5°E	31 lks	20.5'
Beech	18"	S34°W	19.6 lks	13.0'

OTHER HISTORICAL SURVEY INFORMATION:

In 1994, Phil Tapp noted that he found a stone at this corner (Survey ID 38 - Instrument Number 405948). The recorded survey drawing does not depict the stone or provide dimensions to it, but BRCJ provided a digital file of the 1994 survey and we were able to verify that the stone we found is the same as the stone noted on the Tapp survey. In 1999, Raymond Graham described the POB of the south adjoiner to the cemetery as 83.31' south and 2.0' west of the South-East 1/16 corner (monument type not identified) on an unrecorded survey on file in the office of the Monroe County Recorder (Survey ID 40). The Graham survey states that no field survey was performed, but we found a rebar 84.14' south and 0.83' east of the stone. The Graham survey does not identify a monument at the POB or the South-East 1/16 corner. In 2017, the stone was accepted by Eric Deckard (Survey ID 34 - Instrument Number 2017004047) and Corey Allen (Survey ID 35 - Instrument Number 2017007887).

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE:

Date of Search: 02/07/2017

By: Rachel Oser

Monument Found: 3" x 1" pointed top stone with no markings found 0.3' above grade.

BTs or Reference Objects Found: none

Notes: The stone is in line with the apparent intersection of north/south and east/west fence, in the northwest corner of the unused, western portion of Hanson Cemetery.

ORIGIN: We recovered planted stones at several of the other corners shown on the 1871 survey that also called for set stakes. A stone was found 1316.44' south at CICr_P25, and a stone was found 1311.84' west at CICr_O24. The other found stones were also unmarked limestone.



Trohn Enright-Randolph
Monroe County Surveyor



Accepted by the Monroe
County Surveyor Review Board
on March 20, 2018



Rachel Oser
Rachel Savich Oser, State of Indiana
Professional Surveyor No. 21100022

SHEET
2
OF
2

MONUMENT RECORD
CORNER ID:
CICr_P24

South-East 1/16 Corner
Section 34- T07N-R01W
Clear Creek Township
Monroe County, Indiana



MONROE COUNTY SURVEYOR'S OFFICE
Trohn Enright-Randolph Monroe County Surveyor
Rachel Savich Oser Professional Surveyor
119 West 7th Street, Bloomington, IN 47404 (812) 349-2570